
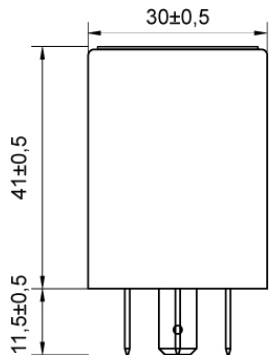


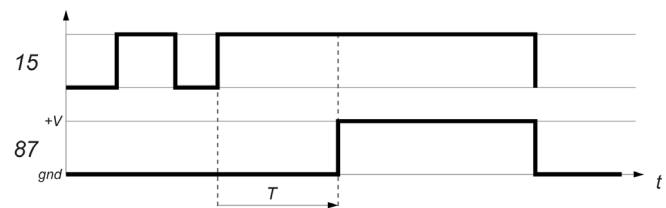
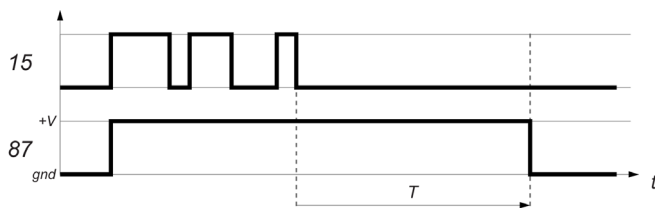


Outline Dimensions – Dimensioni Esterne

Pin Configuration - Pinatura
Wiring Diagram – Schema Circuito

Features - Caratteristiche
T.40.205
T.40.405
RATED VOLTAGE
RATED VOLTAGE
12V
24V
AMPERAGE
AMPERAGE
10A
10A
Delay OFF
Delay ON


0	0,5 ... 10s Delay OFF
1	5 ... 60s Delay OFF
2	0,5 ... 10min Delay OFF
3	5 ... 60min Delay OFF
4	0,5 ... 6h Delay OFF

5	0,5 ... 6h Delay ON
6	5 ... 60min Delay ON
7	0,5 ... 10min Delay ON
8	5 ... 60s Delay ON
9	0,5 ... 10s Delay ON

This is a multimer relay with delay OFF and delay ON feature. The delay is not pre-determined and adjustable by the final user.

È un multimer relay con funzione delay OFF e delay ON. Il ritardo è variabile e programmabile direttamente dall'utente finale.

Materials – Materiali

Baseplate – Basetta	Nylon PA 6,6 + 30% Glass fibre Black	Terminals – Terminali	Cu Zn (6,3X0,8mm)
Cap - Coperchio	Nylon PA 6,6 + 15% Glass fibre Black		

Additional Data – Informazioni aggiuntive

In conformity with:	ISO 7588 – DIN 46244 – ISO 8092	EU Dir. 2002/95/EC RoHS	DIN 40050: IP 5K4 Terminals pointing downwards
In conformità con:	UNI EN ISO 9001-2000	DIR. 95/54 CE REG. 10 ECE-ONU/02	EMC DIN 40839

PRO 04.109
REV 00 30/08/2010

Redatto: Nardi Mirko
Data: 30/08/2010

Verificato: Mario Tessaro
Data: 30/08/2010